

# Thermal Properties



Primer Materials

Spring 2022

# Linear Thermal expansion

$$L=L_0(1+\alpha\Delta T)$$

$\alpha$  - Linear thermal expansion coefficient

Material	$\alpha$ [K <sup>-1</sup> ] * 10 <sup>-5</sup>
Aluminum	2.4
Brass	2
Copper	1.7
Epoxy	1.8-2.5
Glass (common)	0.8
Quartz, Fused Silica	0.04
Steel	1.2
Zinc	2.6
Diamond	0.1

# Heat Capacity

- Specific Heat Capacity – the amount of energy needed to increase 1 kg of material 1 degree

$$c = \frac{1}{m} \frac{dQ}{dT} \quad c_p = \text{constant pressure, } c_v = \text{constant volume}$$

$$C_{p, \text{ volume}} = C_p \times \rho \quad C_{p, \text{ mol}} = C_p \times M$$

Substance	[J/(Kg*K)]	[J/(cm <sup>3</sup> *K)]	[J/(mol *K)]
Aluminum	930	2.51	24.3
Copper	390	2.87	24.5
Water, fresh	4179	4.18	75.2
iron	444	3.49	25.1
gold	129	2.49	25.6
zinc	390	2.78	25.2
Lithium	3580	1.91	24.8
Hydrogen	14000	0.00125	28.8
Ar	520	0.00086	20.8
Diamond	509	1.8	6.1



$$24.9 \text{ J} \cdot \text{mol}^{-1} \cdot \text{K}^{-1} = 3 R$$

# Example

- How much energy one need to invest in order to heat 1 kg of water from 25 °C to 60 °C?
- $C=4179 \text{ [J/(Kg*K)]}$
- $\Delta Q = M * c * \Delta T = 4179 * 35 = 146\text{KJ}$

$$c = \frac{1}{m} \frac{dQ}{dT}$$

# Heat Capacity of Solids

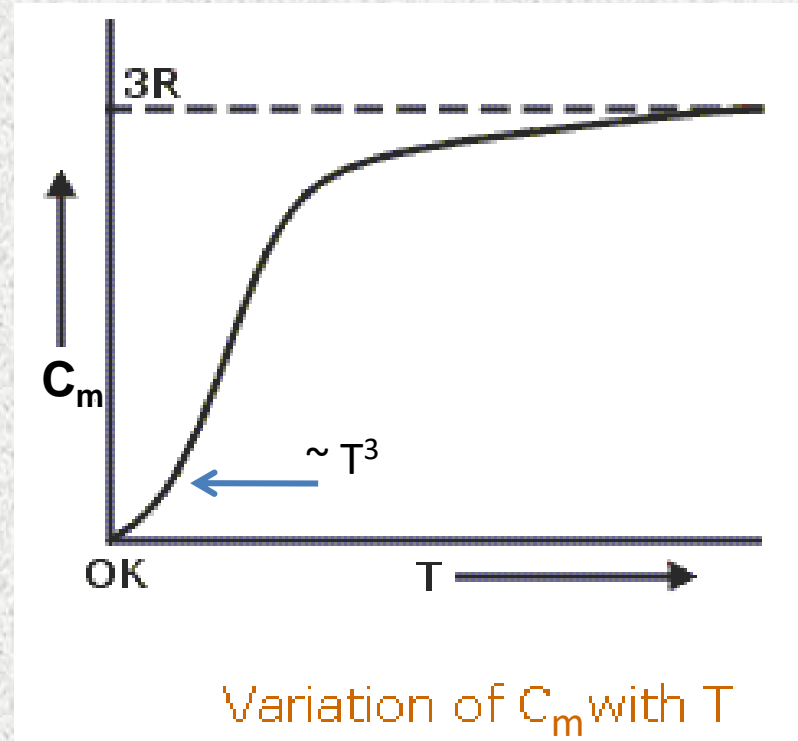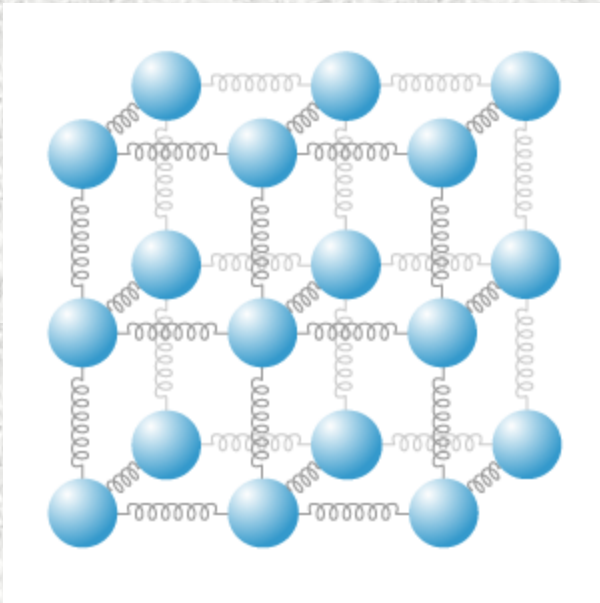

At high temperatures all monoatomic solid crystals have the same heat capacity

$$C_{\text{mol}} = 3 \cdot R = 24.9 \text{ [J/(mol}\cdot\text{K)]}$$

# Thermal Conductivity

Thermal Conductivity– the ability of a material to transport heat

Material	$\lambda$ [W/m*K]	E [GPa]	$\rho$ [gr/cm <sup>3</sup> ]	$\sigma$ [S/cm]
Aluminum	250	68	2.7	$37 \cdot 10^4$
Copper	390	110	8.96	$59 \cdot 10^4$
Brass	130	106	8.73	$16 \cdot 10^4$
PVC	0.19	4	1.3	$10^{-8}$
Glass (SiO <sub>2</sub> )	1	70	2.5	$10^{-10}$
Alumina	25	370	3.7	$10^{-10}$
Steel	54	210	8	$10 \cdot 10^4$
Silver	427	83	10.5	$62 \cdot 10^4$
Diamond	2000	1050	3.5	$10^{-13}$
AlN	170	320	3.25	$10^{-12}$
ZrO <sub>2</sub>	3	100	5.68	$10^{-12}$

$$\lambda_{\text{metal}} \propto \sigma_{\text{electron}}$$

$$\lambda_{\text{insulator}} \propto \sqrt{\frac{E}{\rho}}$$

# Thermal Diffusivity

Thermal Diffusivity— how **fast** a material can transfer temperature

$$D = \frac{\lambda}{C_{volume}}$$

Material	D [cm <sup>2</sup> /sec]
Aluminum	1
Copper	1.36
PVC	0.0014
Glass (SiO <sub>2</sub> )	0.0045
Steel	0.28
Silver	1.73
Diamond	11

# Exercise

1. A zinc rod has a length of 1.9 m at 20 °C. What should its length be a) on a hot day in Sahara desert (48 °C) b) on a cold night in Greenland (-53 °C)
2. An engineer is working on a new engine design. One of the moving parts contains 1.6 kg of Al and 0.3 kg of iron and design to operate at 210 °C. How much heat is required to raise its temperature from 20 to 210 °C
3. Can you think of an a device which can conduct heat in only one direction?



# 1

- The thermal expansion coefficient of zinc is:  $\alpha = 2.6 \times 10^{-5} \text{ [1/K]}$ .
- A)  $\Delta T = 28 \rightarrow L = L_0 + L_0 \alpha \Delta T = 1.9014 \text{ m}$
- B)  $\Delta T = -73 \rightarrow L = L_0 - L_0 \alpha \Delta T = 1.8964 \text{ m}$

2

$$C_{p\_Al} := 910 \frac{\text{J}}{\text{kg} \cdot \text{K}} \quad C_{p\_Fe} := 444 \frac{\text{J}}{\text{kg} \cdot \text{K}}$$

$$M_{Al} := 1.6 \text{kg} \quad M_{Fe} := 0.3 \text{kg}$$

$$\text{kJ} := 1 \cdot 10^3 \text{J}$$

$$\Delta T := 190 \text{K}$$

$$\Delta Q_{Al} := M_{Al} \cdot C_{p\_Al} \cdot \Delta T$$

$$\Delta Q_{Fe} := M_{Fe} \cdot C_{p\_Fe} \cdot \Delta T$$

$$\Delta Q := \Delta Q_{Al} + \Delta Q_{Fe}$$

$$\Delta Q = 301.948 \text{kJ}$$

# 3

- Consider put two parts with similar dimensions made from two different materials with different thermal expansion.
- When heat will flow from right to left the red material will expand and will touch the blue one and heat will flow.
- The thermal expansion coefficient of the blue is much smaller than the red. So if heat comes from left to right the blue material will not touch the red and heat will not flow from left to right

